

パワートランジスタ用ソケット 評価用基板セット Power Transistor Test Sockets + Evaluation Test Board Set

仕様 Specifications

定格電流 Current Rating : DC20A at 25°C (Between Drain and Source)
Room temperature with 30°C T-Rise

絶縁抵抗 Insulation Resistance : 500MΩ min.

耐電圧 Withstanding Voltage : DC4000V 1minute at 25°C
AC3000Vrms 1 minute at 25°C
(Between Drain and Source)


使用温度範囲 Operating Temperature : -55°C~+175°C

推奨電線
Recommended Wire
AWG #10 5.5mm²


- TO-220, TO-3P, TO-66, TO-247, TO-254,
TO-257, TO-262, TO-264用

How to order

T3PH-L214-ST-BK-TEKB

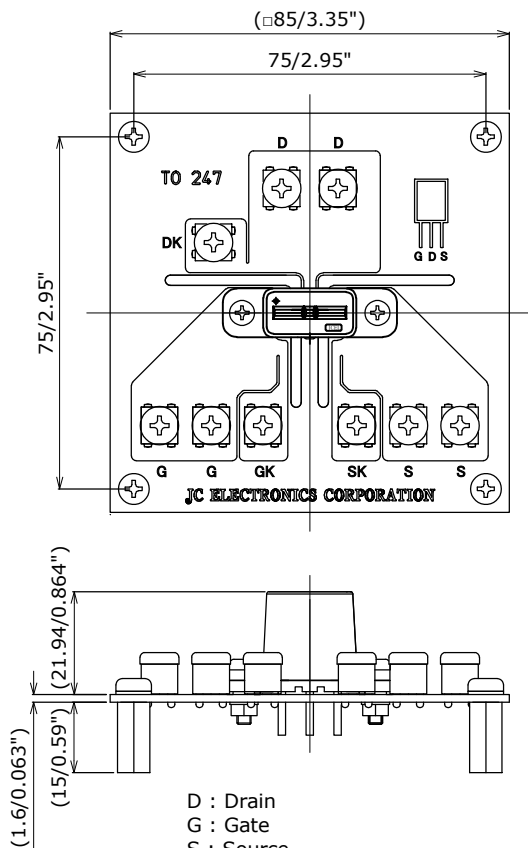

D : Drain
G : Gate
S : Source
GK, DK, SKはケルビン測定用です。
GK, DK, SK are for Kelvin measurements.

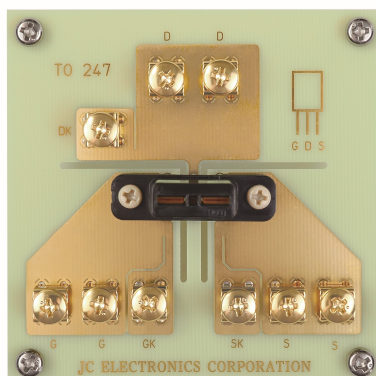


Test socket P/N : T3PH-L214-ST-BK
PC Board size : 85mm x 85mm
PC Board thickness : 1.6mm


- TO-247-4L用

How to order

T4P-L214-ST-BK-TEKB

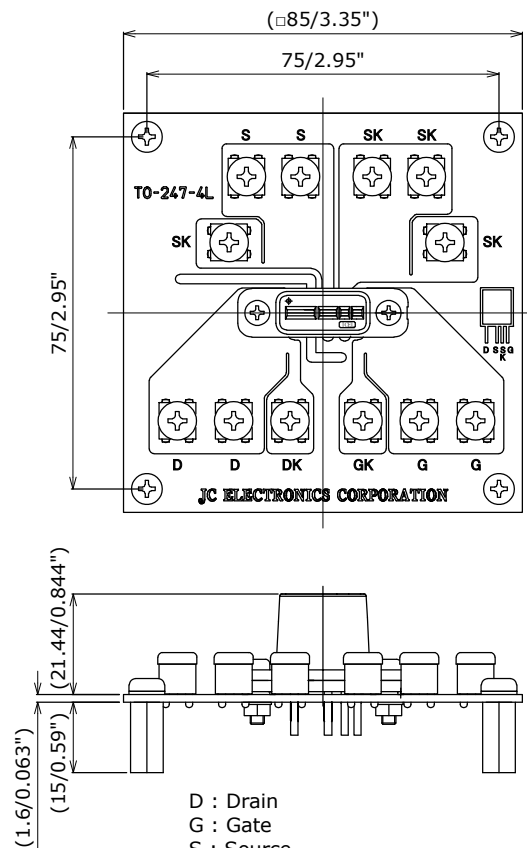

D : Drain
G : Gate
S : Source
GK, DK, SKはケルビン測定用です。
GK, DK, SK are for Kelvin measurements.

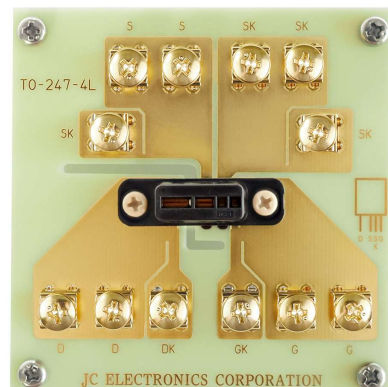

Test socket P/N : T4P-L214-ST-BK
PC Board size : 85mm x 85mm
PC Board thickness : 1.6mm